




430 Leo Street _ Dayton, Ohio 45404
 Phone (937) 463-4810 _ Toll Free (866) 878-9283 _ Fax (937) 463-4824

403 West Main Street _ Fountain City, Indiana 47341
 Phone (765) 847-2561 _ Toll Free (800) 331-6040 _ Fax (765) 847-2027

Fleck 2510 Greensand Systems

Iron Removal

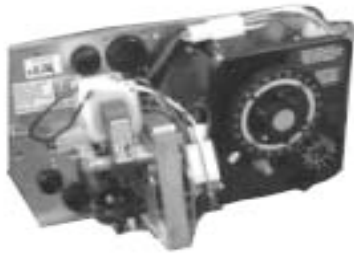

2510-TC

Includes the 2510 control valve, 3/4" NPT brass yoke, polyglass mineral tank and 10" x 16" potassium solution tank with safety valve.

Units can be customized.

See options section or call for pricing and availability.



Manganese Greensand Systems

Manganese Greensand acts as a catalyst to oxidize iron, manganese, and hydrogen sulfide. Requires a weak solution of potassium permanganate for regeneration.

Max removal up to:

15ppm Iron

5ppm Manganese

or 5ppm Hydrogen Sulfide.

Greensand Operating Conditions

PH Range: 6.2-8.5

Maximum Water Temperature 80°F

Regeneration: 2-4 oz of Pot. Perm. per cu. ft.

Attrition Loss 2% per year

Greensand Physical Properties

Color - Black

85lbs / cu. ft.

Mesh Size 14 x 40

2510 Greensand Filter					
Model #	Media Quantity	Mineral Tank	Service Flow Rate	Backwash Flow Rate	List Price
AFE-10-2510	1	9x48	5.5	6	\$976.00
AFE-15-25	1.5	10x54	6	7	\$1,065.00
AFE-20-25	2	12x52	8	9	\$1,241.00