

**Clack MTM<sup>®</sup> is used for reducing iron, manganese and hydrogen sulfide from water supplies.**

# MTM<sup>®</sup>



Clack MTM<sup>®</sup> is a granular manganese dioxide filtering media used for reducing iron, manganese and hydrogen sulfide from water. Its active surface coating oxidizes and precipitates soluble iron and manganese. Hydrogen sulfide is oxidized to a sulfur. The precipitates are filtered out in the granular bed and removed by backwashing.

MTM<sup>®</sup> consists of a light weight granular core with a coating of manganese dioxide. The coating provides an example of contact filtration where the media itself provides the oxidizing potential. This allows for a much broader range of operation than many other iron removal medias. A pH level as low as 6.2 can be treated. Dissolved oxygen is not essential. The media's light weight reduces backwash water requirements.

When the oxidizing power of MTM<sup>®</sup> is reduced, the bed has to be regenerated with a weak solution of potassium permanganate (KMnO<sub>4</sub>), thus restoring its oxidizing capacity. A regenerating solution of 1½ to 2 ounces (dry weight) of potassium permanganate per cubic foot is sufficient for normal regeneration. Upon start-up a new bed should be backwashed and caution taken to insure that the lightweight media is not backwashed to drain. A new bed should be regenerated the evening of installation. **Operating the filter after its oxidizing capacity is exhausted will reduce its service life and may cause staining.**

MTM<sup>®</sup> requires either intermittent or continuous regeneration to maintain its oxidizing capacity. A solution of potassium permanganate (or chlorine then potassium permanganate) can be pre-fed to maintain capacity. In the latter case, the manganese dioxide coating acts as a catalyst to enhance the oxidation reaction and as a buffer to reduce any excess potassium permanganate concentration and prevent it from entering the service lines.

**Addition of other chemicals to influent or backwash water which contacts MTM<sup>®</sup> media may inhibit iron, manganese or hydrogen sulfide removal or may break down or coat MTM<sup>®</sup> media. Before adding any chemical to the influent or backwash water, other than chlorine or potassium permanganate, the chemical's compatibility with MTM<sup>®</sup> should be thoroughly tested.**

#### ADVANTAGES

- Broad operating range for iron reduction
- Lower pressure loss through the bed with high flock holding capacity
- Effective hydrogen sulfide, iron and manganese reduction.
- Light weight requires lower backwash rates and reduces pumping requirements
- Chlorine can be beneficial in extending filter run times
- Low attrition loss for long bed life
- Lower shipping cost

#### PHYSICAL PROPERTIES

- Color: Dark brown
- Bulk Density: 45 lbs./cu. ft.
- Specific Gravity: 2.0 gm/cc
- Effective Size: 0.43 mm
- Uniformity Coefficient: 2.0
- Mesh Size: 14 x 40

#### CONDITIONS FOR OPERATION

- Water pH range: 6.2-8.5
- Maximum water temp: 100°F/38°C
- Bed depth: 24-36 in.
- Freeboard: 50% of bed depth (min.)
- Service flow rate: 3-5 gpm/sq. ft., 8-10 gpm/sq. ft. intermittent flow possible
- Backwash flow rate: 8-10 gpm/sq. ft.
- Backwash expansion rate: 20-40% of bed depth (min.)
- Regenerant dosage: 1½-2 oz of KMnO<sub>4</sub> by weight per cu. ft.


#### INFLUENT AND BACKWASH LIMITATIONS

- Oil: None present
- Polyphosphates: None present


#### CAPACITY PER CU. FT.

- Iron (Fe<sup>+2</sup>) alone  
600 grains (10,000 ppm)
- Manganese (Mn<sup>+2</sup>) alone  
300 grains (5,000 ppm)
- Hydrogen Sulfide (H<sub>2</sub>S) alone  
175 grains (3,000 ppm)

### Service Flow Pressure Drop

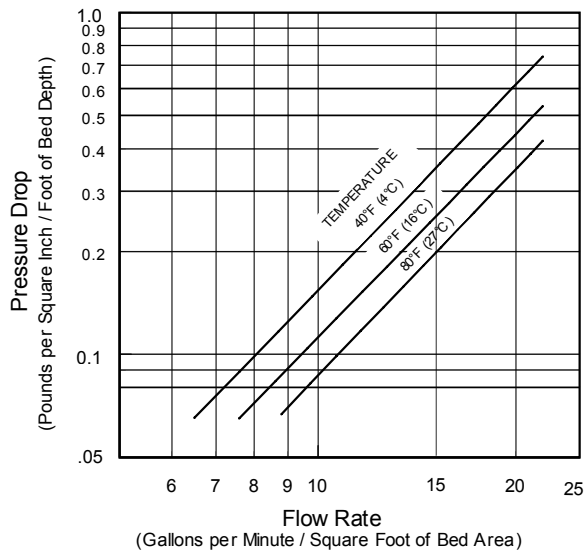

### Backwash Bed Expansion

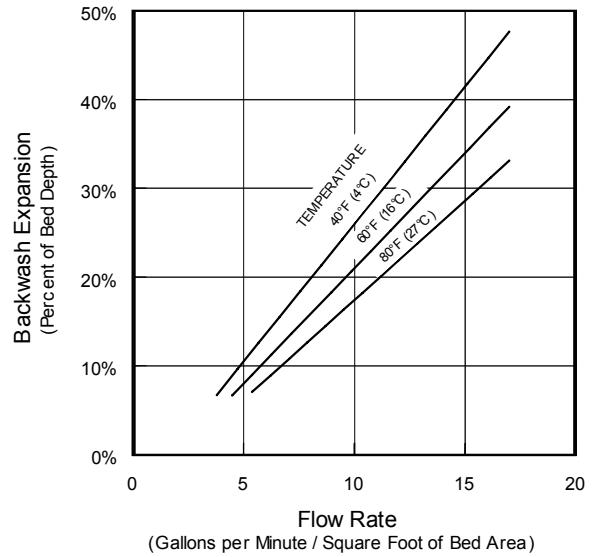

Certified to NSF/ANSI Standard 61



Classified by  
Underwriters Laboratories Inc.®  
in Accordance with  
Standard NSF/ANSI 61

### ORDER INFORMATION

Part No.	Description	Cu. Ft./Bag	Wt./Cu. Ft.*	Bags/Pallet	Weight/Pallet	Pallet Dimensions
A8012	MTM®	1	45 lbs.	40	1850 lbs.	40" x 48" x 42"

\*Weight per cubic foot is approximate.

**Clack Corporation** 

4462 Duraform Lane  
Windsor, Wisconsin 53598-9716 USA

Phone (608) 846-3010

Fax (608) 846-2586

Sales Fax (800) 755-3010

www.clackcorp.com

Form No. 2353  
Updated 06/03

MTM® is a federally registered trademark of Clack Corporation.

The information and recommendations in this publication are based on data we believe to be reliable. They are offered in good faith, but do not imply any warranty or performance guarantee, as conditions and methods of use of our products are beyond our control. As such, Clack makes no express or implied warranties of any kind with respect to this product, including but not limited to any implied warranty of merchantability or fitness for a particular purpose. We recommend that the user determine whether the products and the information given are appropriate, and the suitability and performance of our products are appropriate, by testing with its own equipment. Specifications are subject to change without notice.

The information and recommendations given in this publication should not be understood as recommending the use of our products in violation of any patent or as a license to use any patents of the Clack Corporation.

The filter medias listed in this brochure do not remove or kill bacteria. Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

Clack will not be liable under any circumstance for consequential or incidental damages, including but not limited to, lost profits resulting from the use of our products.